

475W

JAM54D40 LR Black Frame
n-type Double Glass Monofacial Modules

Premium Cells

**n-
Bycium+**
16BBMBB Half-Cell
Technology


Premium Modules

Superior energy yield for lower LCOE

High-efficiency with advanced n-type Bycium+ cell technology


Higher power output with High-density module design

Excellent reliability, certified by authoritative institutions

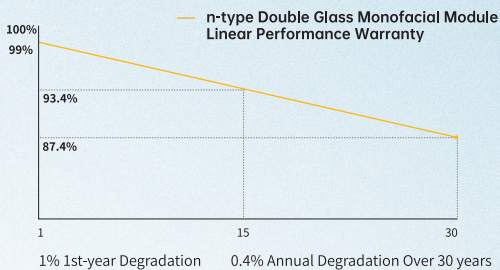**15** 15-year product
warranty**30** 30-year linear power
output warranty


Comprehensive Certificates

- IEC 61215, IEC 61730, UL 61215, UL 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing

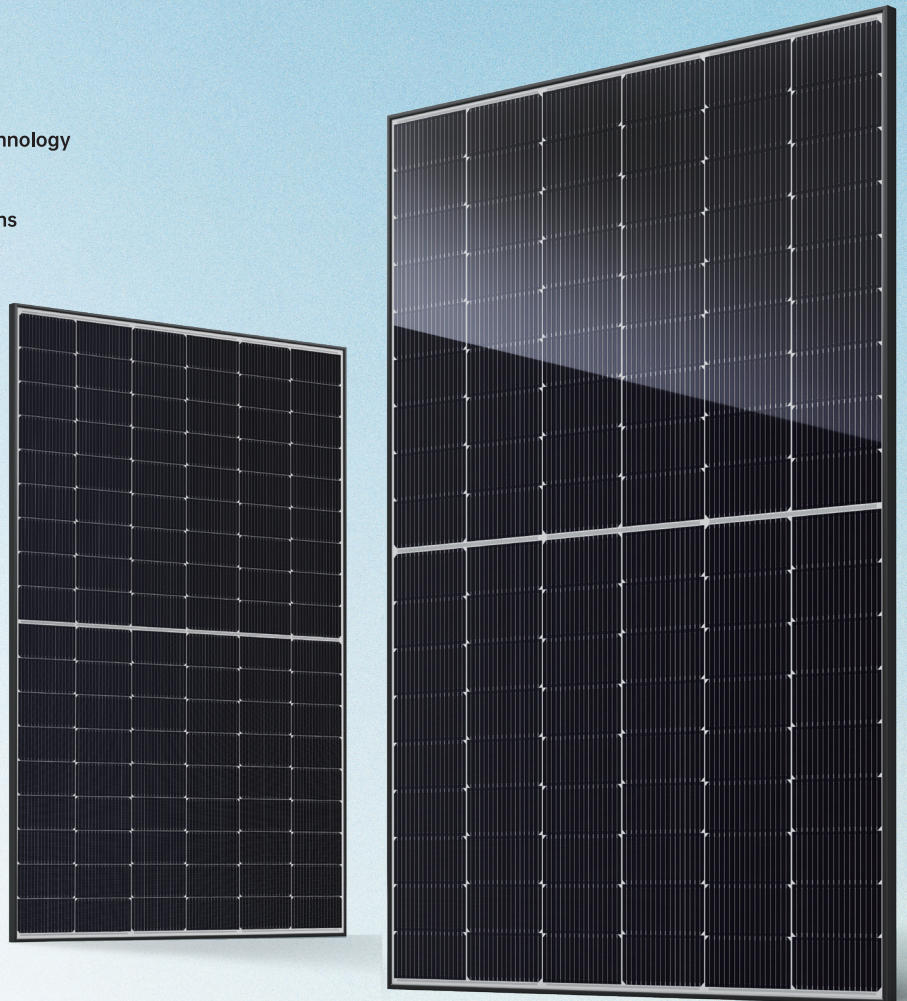

475W

JAM54D40 LR n-type Double Glass Monofacial Modules

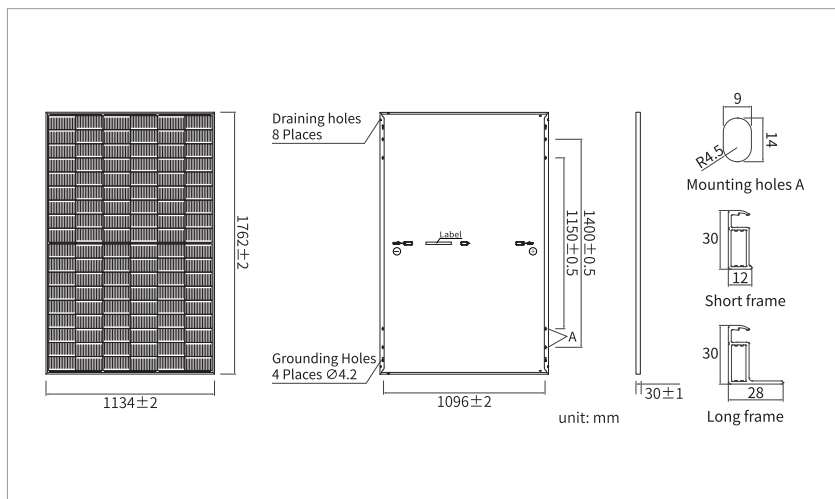

MECHANICAL PARAMETERS



Cell	Mono
Weight	22.0kg
Dimensions	1762±2mm×1134±2mm×30±1mm
Cable Cross Section Size	4mm ² (IEC), 12 AWG(UL)
No. of cells	108(6×18)
Junction Box	IP68, 3diodes
Connector	QC 4.10-351/ MC4-EVO2A
Cable Length (Including Connector)	Portrait: 400mm(+)/200mm(-) Landscape: 1200mm(+)/1200mm(-)
Frame	Anodized Aluminium Alloy
Front Glass	1.6mm, Anti-reflection Coating
Back Glass	1.6mm, Heat Strengthened Glass
Packaging Configuration	36pcs/Pallet, 936pcs/40HQ Container
Remark: customized frame color and cable length available upon request	

ELECTRICAL PARAMETERS AT STC

TYPE	JAM54D40 -450/LR	JAM54D40 -455/LR	JAM54D40 -460/LR	JAM54D40 -465/LR	JAM54D40 -470/LR	JAM54D40 -475/LR
Rated Maximum Power(P _{max}) [W]	450	455	460	465	470	475
Open Circuit Voltage (V _{oc}) [V]	39.30	39.50	39.70	40.20	40.40	40.55
Maximum Power Voltage(V _{mp}) [V]	32.82	33.00	33.17	33.50	33.84	34.18
Short Circuit Current(I _{sc}) [A]	14.48	14.56	14.64	14.65	14.66	14.67
Maximum Power Current(I _{mp}) [A]	13.71	13.79	13.87	13.88	13.89	13.90
Module Efficiency [%]	22.5	22.8	23.0	23.3	23.5	23.8
Power Tolerance	0~+3%					
Temperature Coefficient of I _{sc} (α _{Isc})	+0.045%/°C					
Temperature Coefficient of V _{oc} (β _{Voc})	-0.250%/°C					
Temperature Coefficient of P _{max} (γ _{Pmp})	-0.290%/°C					
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G					

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

CHARACTERISTICS

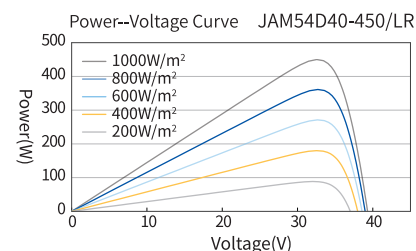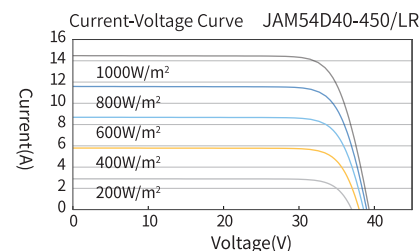

ELECTRICAL PARAMETERS AT NOCT

TYPE	JAM54D40 -450/LR	JAM54D40 -455/LR	JAM54D40 -460/LR	JAM54D40 -465/LR	JAM54D40 -470/LR	JAM54D40 -475/LR
Rated Max Power(P _{max}) [W]	341	344	348	352	356	360
Open Circuit Voltage(V _{oc}) [V]	37.19	37.37	37.57	38.04	38.23	38.37
Max Power Voltage(V _{mp}) [V]	31.06	31.22	31.38	31.68	32.00	32.31
Short Circuit Current(I _{sc}) [A]	11.58	11.65	11.71	11.72	11.73	11.74
Max Power Current(I _{mp}) [A]	10.97	11.03	11.10	11.11	11.12	11.13
NOCT	Front Irradiance 800W/m ² , ambient temperature 20°C, wind speed 1m/s, AM1.5G					

OPERATING CONDITIONS

Maximum System Voltage	1500V DC
Operating Temperature*	-40°C~+70°C
Maximum Series Fuse Rating	25A
Maximum Static Load, Front	5400Pa(112 lb/ft ²)
Maximum Static Load, Back	2400Pa(50 lb/ft ²)
NOCT	45±2°C
Safety Class	Class II
Fire Performance	UL Type 38/Class C

*PV module 98th percentile operating temperature : 70°C



Headquarters

No. 8 Building, Nuode Center, No.1 Courtyard, East Auto Museum Road,
Fengtai District, Beijing
Tel: +86 10 6361 1888 Fax: +86 10 6361 1999
E-mail: sales@jasolar.com marketing@jasolar.com www.jasolar.com

Specifications subject to technical changes and tests.
JA Solar reserves the right of final interpretation.

Version No.: Global-EN-20260424A